




Product Data

TRANE Link Variable Speed Air Conditioners

5TTV0X24A1000A/B
5TTV0X25A1000A/B
5TTV0X36A1000A/B
5TTV0X48A1000A/B
5TTV0X60A1000A/B



The Diagnostics Mobile App is available by scanning a QR code above, the one located inside this unit or by searching for the Trane or American Standard Diagnostics App in your App Store®. This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.

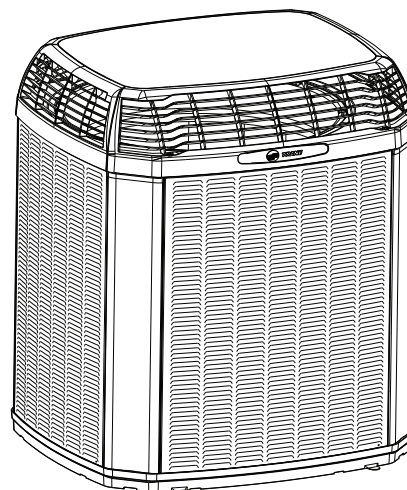

Note: Graphics in this document are for representation only. Actual model may differ in appearance.



Mechanical Specification Options

General

This unit is designed to operate at outdoor ambient temperatures from 55° F to 120° F in cooling. From — 0° F to 66° F in heating (heat pumps only). Only AHRI approved indoor matches are approved for use with these models.

TRANE Link Air Conditioners

This outdoor unit contains the TRANE Link Air Conditioners digital communication with Plug-n-Play set up.

Casing

Unit casing is constructed of heavy gauge. G60 galvanized steel and painted with a weather-resistant powder paint on all louvered panels and prepaint on all other panels. Corrosion and weatherproof CMBP-G30 DuraTuff™ base.

WeatherGuard™ II Top Shields Unit.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor inverter drive and high and low pressure switches. A factory supplied, field installed filter is standard.

Compressor

Inverter driven compressor with variable output capacities. Noise enclosure minimizes sound levels. Compressor protections reduce operating speed and current draw to maintain operation while protecting the compressor.

Condenser Coil

The Spine Fin™ outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

SeaCoast Shield.

Low Ambient Cooling

As manufactured, this system has built in freeze protection that will allow cooling operation below 55°F but will reduce capacity or shut down completely to prevent operation under adverse conditions.

Comfort Control

This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.



Product Specifications

OUTDOOR UNIT (a) (b)	5TTV0X24A1000A	5TTV0X24A1000B	5TTV0X25A1000A	5TTV0X25A1000B	5TTV0X36A1000A
POWER CONNS. — V/PH/ HZ (c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
MIN. BRCH. CIR. AMPACITY	19	19	19	19	26
BR. CIR. PROT. RTG. — REC/MAX. (AMPS)	30	20/30	30	20/30	40
COMPRESSOR	ROTARY	ROTARY	ROTARY	ROTARY	SCROLL
NO. USED — NO. SPEEDS	1-VARIABLE	1-VARIABLE	1-VARIABLE	1-VARIABLE	1-VARIABLE
MRC	17.8	17.8	17.8	17.8	18
FACTORY INSTALLED					
START COMPONENTS (d)	NA	NA	NA	NA	NA
INSULATION/SOUND BLANKET	YES	YES	YES	YES	YES
COMPRESSOR HEAT	YES	YES	YES	YES	YES
OUTDOOR FAN					
DIA. (IN.) — NO. USED	23-1	23-1	27.5-1	27.5-1	27.5-1
TYPE DRIVE — NO. SPEEDS	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE
NO. MOTORS — HP	1-1/3	1-1/3	1-1/2	1-1/2	1-1/2
MOTOR SPEED R.P.M.	200-1200	200-1200	200-1200	200-1200	200-1200
VOLTS/PH/HZ	245-385/3/60	245-385/3/60	245-385/3/60	245-385/3/60	245-385/3/60
MOC	1.5	1.5	2.3	2.3	2.3
OUTDOOR COIL — TYPE	SPINE FIN	SPINE FIN	SPINE FIN	SPINE FIN	SPINE FIN
ROWS — F.P.I.	1-24	1-24	2-24	2-24	2-24
FACE AREA (SQ. FT.)	19.77	19.77	30.8	30.8	30.8
TUBE SIZE (IN.)	3/8	3/8	3/8	3/8	3/8
REFRIGERANT	R-454B	R-454B	R-454B	R-454B	R-454B
LBS. — R-454B (O.D. UNIT) (e)	6 LB-8 OZ	6 LB-8 OZ	10 LB-1 OZ	10 LB-1 OZ	11 LB-5 OZ
FACTORY SUPPLIED	YES	YES	YES	YES	YES
RATED LINE SIZE — IN. O.D. GAS (f)	1/2	1/2	1/2	1/2	5/8
RATED LINE SIZE — IN. O.D. LIQ. (f)	5/16	5/16	5/16	5/16	5/16
CHARGING SPECIFICATIONS					
SUBCOOLING	10	10	8	8	8
DIMENSIONS					
CRATED (IN.)	50 x 30 x 33	50 x 30 x 33	55 x 35 x 38	55 x 35 x 38	55 x 35 x 38
WEIGHT					
SHIPPING (LBS.)	208	208	256	256	291
NET (LBS.)	187	187	230	230	265

(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270/275.

(c) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

(d) NA means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter.

(e) This value approximate. For more precise value see unit nameplate.

(f) The maximum length of refrigerant lines from outdoor to indoor varies depending on application. See Installer's Guide Table 4 for allowable applications.



Product Specifications

OUTDOOR UNIT (a) (b)	5TTV0X36A1000B	5TTV0X48A1000A	5TTV0X48A1000B	5TTV0X60A1000A	5TTV0X60A1000B
POWER CONNS. — V/PH/ HZ (c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
MIN. BRCH. CIR. AMPACITY	26	32	32	43	43
BR. CIR. PROT. RTG. — REC/MAX. (AMPS)	30/40	50	35/50	60	40/60
COMPRESSOR	SCROLL	SCROLL	SCROLL	SCROLL	SCROLL
NO. USED — NO. SPEEDS	1-VARIABLE	1-VARIABLE	1-VARIABLE	1-VARIABLE	1-VARIABLE
MRC	18	22.4	22.4	27.5	27.5
FACTORY INSTALLED					
START COMPONENTS (d)	NA	NA	NA	NA	NA
INSULATION/SOUND BLANKET	YES	YES	YES	YES	YES
COMPRESSOR HEAT	YES	YES	YES	YES	YES
OUTDOOR FAN					
DIA. (IN.) — NO. USED	27.5-1	27.5-1	27.5-1	27.5-1	27.5-1
TYPE DRIVE — NO. SPEEDS	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE	DIRECT-VARIABLE
NO. MOTORS — HP	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
MOTOR SPEED R.P.M.	200-1200	200-1200	200-1200	200-1200	200-1200
VOLTS/PH/HZ	245-385/3/60	245-385/3/60	245-385/3/60	245-385/3/60	245-385/3/60
MOC	2.3	2.3	2.3	2.3	2.3
OUTDOOR COIL — TYPE	SPINE FIN	SPINE FIN	SPINE FIN	SPINE FIN	SPINE FIN
ROWS — F.P.I.	2-24	2-24	2-24	2-24	2-24
FACE AREA (SQ. FT.)	30.8	30.8	30.8	30.8	30.8
TUBE SIZE (IN.)	3/8	3/8	3/8	3/8	3/8
REFRIGERANT	R-454B	R-454B	R-454B	R-454B	R-454B
LBS. — R-454B (O.D. UNIT) (e)	11 LB-5 OZ	12 LB-7 OZ	12 LB-7 OZ	12 LB-0 OZ	12 LB-0 OZ
FACTORY SUPPLIED	YES	YES	YES	YES	YES
RATED LINE SIZE — IN. O.D. GAS (f)	5/8	7/8	7/8	7/8	7/8
RATED LINE SIZE — IN. O.D. LIQ. (f)	5/16	5/16	5/16	5/16	5/16
CHARGING SPECIFICATIONS					
SUBCOOLING	8	8	8	8	8
DIMENSIONS					
CRATED (IN.)	55 x 35 x 38	55 x 35 x 38	55 x 35 x 38	55 x 35 x 38	55 x 35 x 38
WEIGHT					
SHIPPING (LBS.)	291	291	291	291	291
NET (LBS.)	265	265	265	265	265

(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270/275.

(c) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

(d) NA means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter.

(e) This value approximate. For more precise value see unit nameplate.

(f) The maximum length of refrigerant lines from outdoor to indoor varies depending on application. See Installer's Guide Table 4 for allowable applications.



Sound Data

Model	Mode	Speed	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power [dB]							
				63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5TTV0X24A	Cool	Min	52	64.2	48.8	52.0	52.3	44.6	37.1	34.2	33.7
	Cool	Max	64	69.5	62.6	59.5	64.4	59.5	50.5	47.0	42.4
5TTV0X25A	Cool	Min	58	65.9	54.9	54.2	58.5	51.2	41.8	32.5	38.7
	Cool	Max	66	73.6	67.1	64.6	63.4	60.8	54.4	47.2	43.4
5TTV0X36A	Cool	Min	53	63.6	51.2	52.5	51.5	48.2	43.4	34.7	38.3
	Cool	Max	69	82.2	70.3	68.3	65.6	65.5	58.3	53.3	48.9
5TTV0X48A	Cool	Min	56	64.8	54.6	56.2	53.6	52.4	47.4	38.0	33.0
	Cool	Max	73	79.7	74.4	72.7	71.3	68.4	63.7	58.2	49.8
5TTV0X60A	Cool	Min	56	62.1	54.6	56.2	53.6	52.4	47.4	38.0	33.0
	Cool	Max	76	77.6	76.7	74.9	74.4	71.6	66.5	61.9	53.7

Note: Rated in accordance with AHRI Standard 270.



Optional Accessories:

Rubber Isolator Kit	BAYISLT101
Snow Leg — Base & Cap 4" High	BAYLEGS002
Snow Leg — 4" Extension	BAYLEGS003
SmartCharge™ Tool	BAYCAKT002
Extreme Condition Mounting Kit	BAYECMT023
Refrigerant Lineset ^(a)	

^(a) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

General Data

AHRI STANDARD 210/240 RATING CONDITIONS


- Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
- High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB entering indoor coil.
- Low Temperature Heating 17°F DB, 15°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
- Rated indoor airflow for heating is the same as for cooling.

AHRI STANDARD 270 RATING CONDITIONS — (Noise rating numbers are determined with the unit in cooling operation) Standard Noise Rating number is at 95°F outdoor air.




Model Nomenclature


Outdoor Units

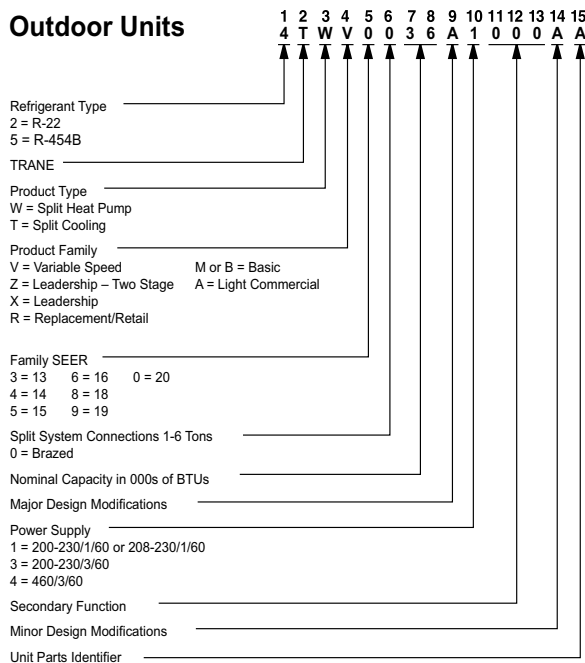


S-Series Furnaces

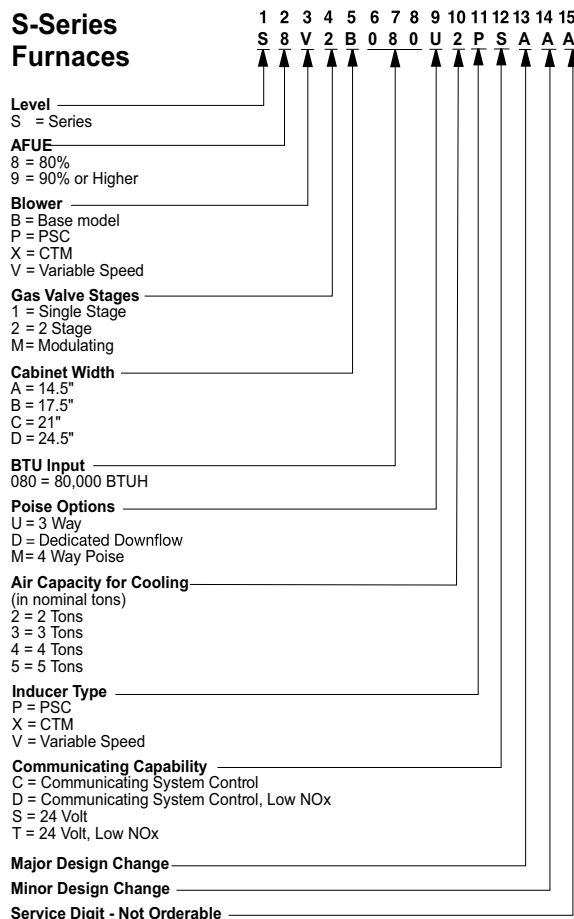


Air Handler

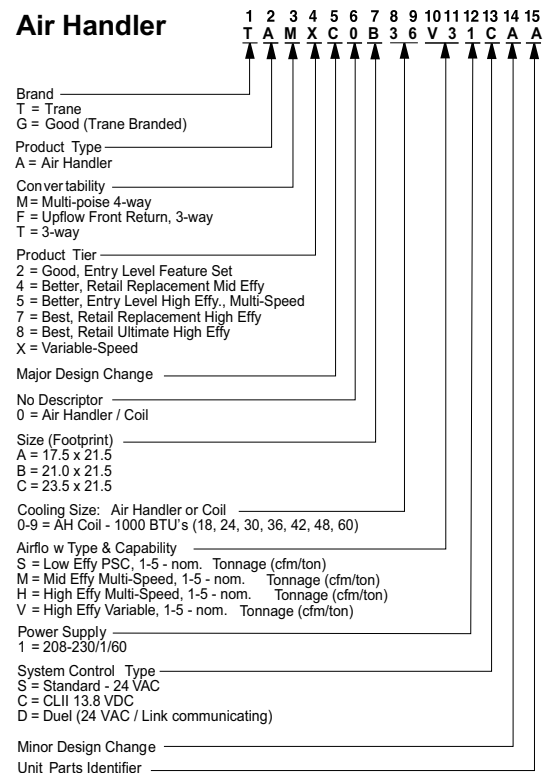

Heat Pump/ Cooling Coils

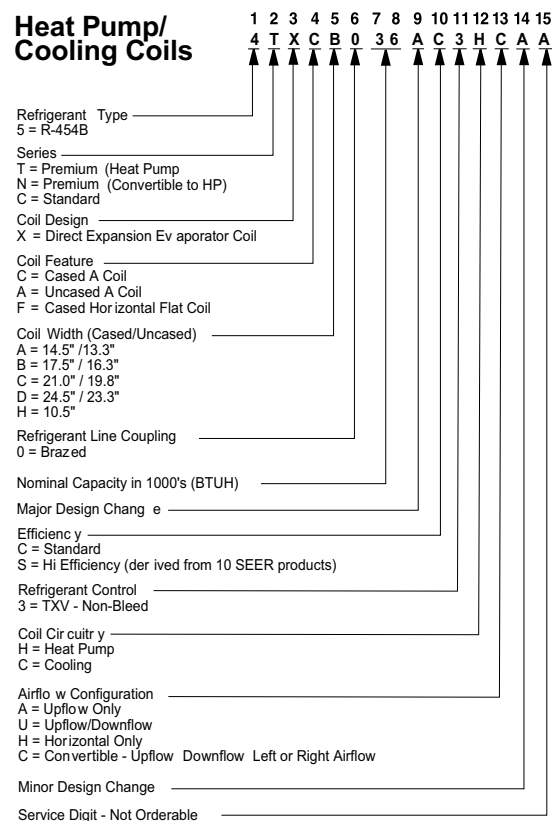



- [illegible]



Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to ahrirectory.org.

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.